


NOTES:

1. Critical Dimensions are **TOLERANCED** and should not be deviated.
2. Dimensions that are labeled **REF** are typical dimensions and may vary slightly from manufacturing lot to manufacturing lot.
3. PAGE 2 fully details the mechanical interface for Series "B" Receptacles.


USB Series "B"	
Contact Number	Contact Assignment
1	V BUS
2	D MINUS
3	D PLUS
4	Ground
Shell	Shield

Part Number	USB Series Type	Pin-Type Receptacle 1 = Single	Shell Plating 1 = Standard 2 = Premium	Contact Plating 1 = Standard 2 = Premium	IO SYSTEMS, INC. (Formerly Elite Electronics) 1110 Summit Avenue - Suite 1 Plano, Texas 75074 USA Tel: (972) 422-7292 Fax: (972) 422-9707 E-mail: sales@eliteld.com	Single Pin-Type			
						Series "B" Receptacle			
SIZE		DATE	DRAWING NUMBER		REV				
A		7/98	18 B 1xx		E				
SCALE: N/A			SHEET 1 of 4						

USB Series "B" Receptacle Interface

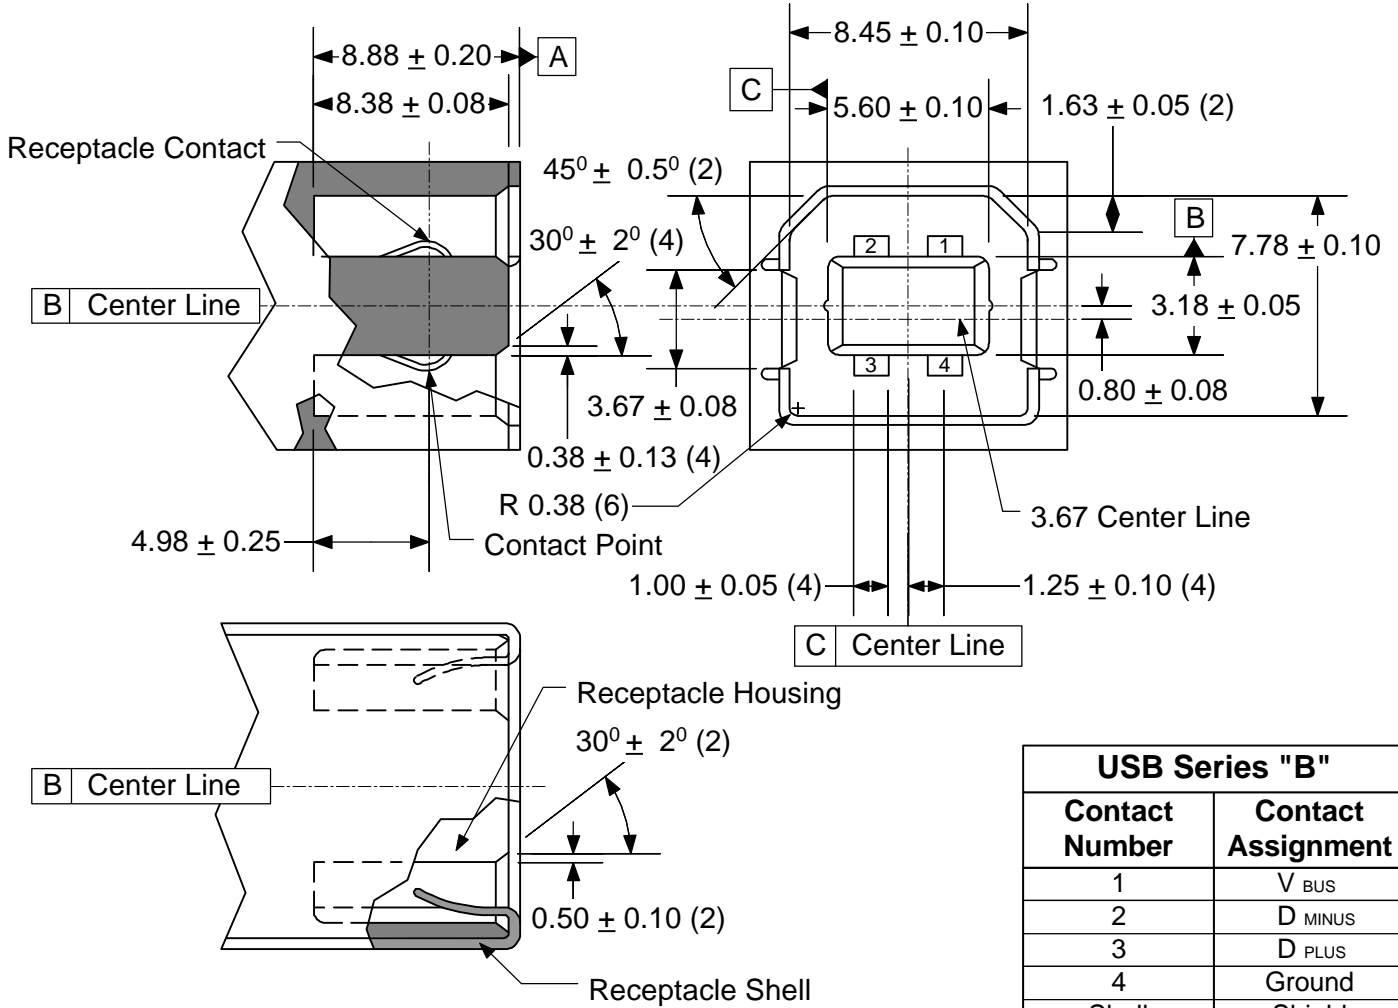

USB Series "B" Receptacle and Plug Mating Features

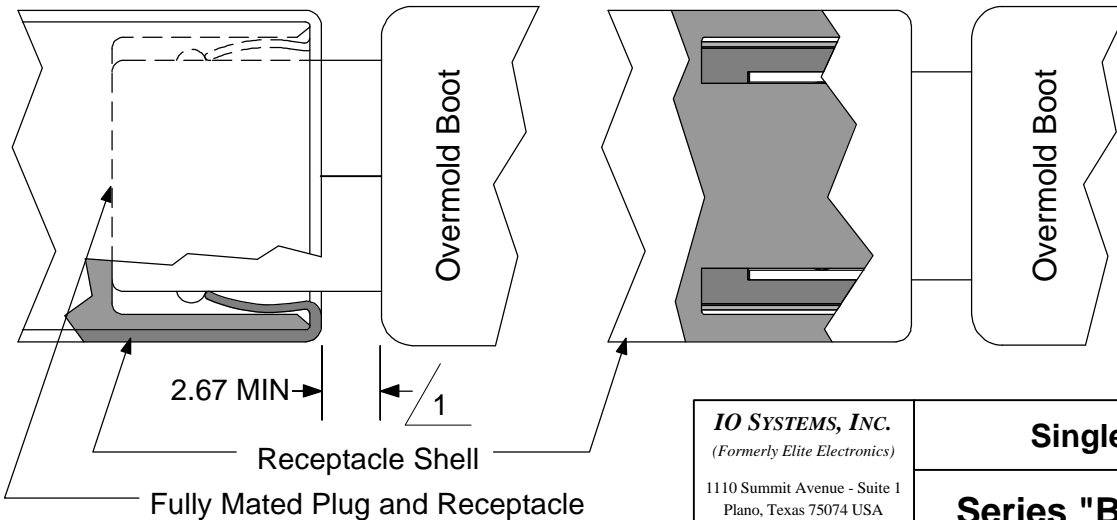

1 Allow a minimum spacing of 2.67mm between the face of the receptacle and the plug overmold boot.

IO SYSTEMS, INC.
(Formerly Elite Electronics)

1110 Summit Avenue - Suite 1
Plano, Texas 75074 USA
Tel: (972) 422-7292
Fax: (972) 422-9707
E-mail: sales@eliteld.com

Single Pin-Type

Series "B" Receptacle

SIZE A	DATE 7/98	DRAWING NUMBER 18 B 1xx	REV E
------------------	--------------	-----------------------------------	-----------------

SCALE: **N/A** SHEET **2 of 4**

	8	7	6	5	4	3	2	1													
H	<p>1.0 Receptacle Injection Molded Thermoplastic Insulator Material. Minimum UL 94-V0 rated, thirty percent (30%) glass-filled polybutylene terephthalate (PBT), polyethylene terephthalate (PET) or better.</p> <p>1.1 Typical Colors:</p> <p>1.1.1 White. When ordering 'Black' colored insulators add "-001" to the part number.</p> <p>1.1.2 Black. When ordering 'Gray' colored insulators add "-002" to the part number.</p> <p>1.1.3 Gray. When ordering 'Natural' colored insulators add "-003" to the part number.</p> <p>1.2 Flammability Characteristics. UL 94-V0 rated.</p> <p>1.2.1 Flame Retardant Package must meet or exceed the requirements for UL, CSA, VDE, et cetera.</p> <p>1.2.2 Oxygen Index (LOI). Greater than 21%. ASTM D 2863.</p>								H												
G	<p>2.0 Receptacle Shell Materials.</p> <p>2.1 Substrate Material. 0.30 ± 0.05 mm phosphor bronze, nickel silver or other copper based high strength materials.</p> <p>2.2 Plating:</p> <p>2.2.1 Underplate. Optional. Minimum 1.00 micrometers (40 microinches) Nickel. In addition, manufacturer may use a copper underplate beneath the nickel.</p> <p>2.2.2 Outside. Minimum 2.5 micrometers (100 microinches) Bright Tin or Bright Tin-Lead.</p>								G												
F	<p>3.0 Receptacle Contact Materials:</p> <p>3.1 Substrate Material. 0.30 ± 0.05 mm minimum half-hard phosphor bronze or other the high strength copper based material.</p> <p>3.2 Plating. Contacts are to be selectively plated.</p> <p>3.2.1 Standard.</p> <p>A. Underplate. Minimum 1.25 micrometers (50 microinches) Nickel. Copper over base material is optional.</p> <p>B. Mating Area. Minimum 0.75 micrometers (30 microinches) Gold.</p> <p>C. Solder Tails. Minimum 3.8 micrometers (150 microinches) Bright Tin-Lead over the underplate.</p> <p>3.2.2 Premium — Option I.</p> <p>A. Underplate. Minimum 1.25 micrometers (50 microinches) Nickel. Copper over base material is optional.</p> <p>B. Mating Area. Minimum 0.05 micrometers (2 microinches) Gold over a minimum of 0.70 micrometers (28 microinches) Palladium.</p> <p>C. Solder Tails. Minimum 3.8 micrometers (150 microinches) Bright Tin-Lead over the underplate.</p> <p>3.2.3 Premium — Option II.</p> <p>A. Underplate. Minimum 1.25 micrometers (50 microinches) Nickel. Copper over base material is optional.</p> <p>B. Mating Area. Minimum 0.05 micrometers (2 microinches) Gold over a minimum of 0.75 micrometers (30 microinches) Palladium-Nickel.</p> <p>C. Solder Tails. Minimum 3.8 micrometers (150 microinches) Bright Tin-Lead over the underplate.</p>								F												
E									E												
D									D												
C									C												
B									B												
A					<p>IO SYSTEMS, INC. <i>(Formerly Elite Electronics)</i></p> <p>1110 Summit Avenue - Suite 1 Plano, Texas 75074 USA Tel: (972) 422-7292 Fax: (972) 422-9707 E-mail: sales@eliteltd.com</p>				<p>Single Pin-Type</p> <p>Series "B" Receptacle</p> <table border="1"> <tr> <td>SIZE</td> <td>DATE</td> <td>DRAWING NUMBER</td> <td>REV</td> </tr> <tr> <td>A</td> <td>7/98</td> <td>18 B 1xx</td> <td>E</td> </tr> </table> <p>SCALE: N/A SHEET 3 of 4</p>				SIZE	DATE	DRAWING NUMBER	REV	A	7/98	18 B 1xx	E	A
SIZE	DATE	DRAWING NUMBER	REV																		
A	7/98	18 B 1xx	E																		
	8	7	6	5	4	3	2	1													

	8	7	6	5	4	3	2	1																															
H	<p>4.0 Performance Characteristics. IOS' USB connectors will meet or exceed the performance characteristics as specified in Chapter 6 of the most current version of the USB Specification. Minimum electrical and environmental performance capabilities shall be as follows:</p>								H																														
G	<p>4.1 Insulation Resistance (EIA 364 — 21). Test units must meet or exceed a minimum of 1,000MΩ.</p>								G																														
F	<p>4.2 Dielectric Withstanding Voltage (EIA 364 — 20). The dielectric must withstand 500 VAC for minute at sea level.</p>								F																														
E	<p>4.3 Low Level Contact Resistance (EIA 364 — 23). 30 mΩ maximum when measured at 20 mV maximum open circuit at 100 mA. Mated test contacts must be in a connector housing.</p>								E																														
D	<p>4.4 Contact Current Rating (EIA 364 — 70). 1.5 A at 250 VAC minimum when measured at +25°C. With power applied to the contacts, ΔT shall not exceed +30°C at any point in the USB connector under test.</p>								D																														
C	<p>4.5 Contact Capacitance (EIA 364 — 30). 2 pF maximum per unmated contact.</p>								C																														
B	<p>4.6 Insertion Force (EIA 364 — 13). 35 Newtons maximum at a maximum rate of 12.5 mm (0.492") per minute.</p>								B																														
A	<p>4.7 Extraction Force (EIA 364 — 13). 10 Newtons minimum at a maximum rate of 12.5 mm (0.492") per minute.</p>								A																														
	<p>4.8 Durability (EIA 364 — 09). 1500 'insertion'/'extraction' cycles at a maximum rate of 200 cycles per hour.</p>																																						
	<p>4.9 Accelerated Life Testing (EIA 364 — 17). 250 Hours at + 85°C with a 10 VPP 16 MHz square wave applied to mated contacts. (<i>Note: Mated contacts must be contained in an IOS connector body.</i>)</p>																																						
	<p>4.10 Humidity Life Testing (EIA 364 — 31). 168 Hours, seven (7) complete cycles.</p>																																						
	<p>4.11 Random Vibration (EIA 364 — 28). No discontinuities of 1μs or longer duration when mated USB connectors are subjected to 5.35 Gs RMS. 15 minutes in each of three mutually perpendicular planes.</p>																																						
	<p>4.12 Physical Shock (EIA 364 — 27). No discontinuities of 1μs or longer duration when mated USB connectors are subjected to 11 ms duration 30Gs half-sine shock pulses. Three shocks in each direction applied along three mutually perpendicular planes for 18 shocks.</p>																																						
	<p>4.13 Thermal Shock (EIA 364 — 62). 10 Cycles — -25°C and +85°C. The USB connectors under test must be mated.</p>																																						
	<p>4.14 Solderability (EIA 364 — 52). USB connector contact solder tails shall pass 95% coverage after one hour steam aging as specified in Category 2.</p>																																						
	<p>4.15 Flammability (UL94 — V-0). Upon request USB connector manufacturers may be required to provide a C of C that shows their insulator material's UL listing number or test data that shows the insulator material is capable of passing the UL94 V-0 Flame Impingement Test Criteria.</p>																																						
	<table border="1"> <tr> <td colspan="2"> IO SYSTEMS, INC. <i>(Formerly Elite Electronics)</i> </td> <td colspan="4" style="text-align: center;">Single Pin-Type</td> </tr> <tr> <td colspan="2"> 1110 Summit Avenue - Suite 1 Plano, Texas 75074 USA Tel: (972) 422-7292 Fax: (972) 422-9707 E-mail: sales@eliteltd.com </td> <td colspan="4" style="text-align: center;">Series "B" Receptacle</td> </tr> <tr> <td>SIZE</td> <td>DATE</td> <td colspan="2">DRAWING NUMBER</td> <td colspan="2">REV</td> </tr> <tr> <td>A</td> <td>7/98</td> <td colspan="2">18 B 1xx</td> <td colspan="2">E</td> </tr> <tr> <td colspan="2">SCALE: N/A</td> <td colspan="2">SHEET</td> <td colspan="2">4 of 4</td> </tr> </table>								IO SYSTEMS, INC. <i>(Formerly Elite Electronics)</i>		Single Pin-Type				1110 Summit Avenue - Suite 1 Plano, Texas 75074 USA Tel: (972) 422-7292 Fax: (972) 422-9707 E-mail: sales@eliteltd.com		Series "B" Receptacle				SIZE	DATE	DRAWING NUMBER		REV		A	7/98	18 B 1xx		E		SCALE: N/A		SHEET		4 of 4		
IO SYSTEMS, INC. <i>(Formerly Elite Electronics)</i>		Single Pin-Type																																					
1110 Summit Avenue - Suite 1 Plano, Texas 75074 USA Tel: (972) 422-7292 Fax: (972) 422-9707 E-mail: sales@eliteltd.com		Series "B" Receptacle																																					
SIZE	DATE	DRAWING NUMBER		REV																																			
A	7/98	18 B 1xx		E																																			
SCALE: N/A		SHEET		4 of 4																																			
	8	7	6	5	4	3	2	1																															